

AR40 90 Ah

Battery:	zinc-air 0% Hg, 0% Cd
Nominal voltage:	1,25 V
Discharge voltage:	0,90 V
Operating temperatures:	-5 °C ÷ 45 °C*
Minimum average time of discharge:	120 days
Minimum average capacity:	after one year proper storage 80% of beginning value*
W/L/H	Ø61/142± 1mm
Terminals:	“+” 165 mm „-“ 170 mm
Guaranteed shelf life:	24 months
Weight:	0,47 ± 0.1 kg
Packaging:	30 pcs/carton

Battery storage conditions and use conditions :

Temperature: 10-25 ° C*


Humidity: 40-95%*

Do not store batteries near heat sources or in direct sunlight.

Before connecting the battery – the vent plugs must be removed to provide air flow.

In order to make effective use of the battery, follow the electric appliance instructions (a suitable construction and length of the fence, suitable fencing wires, correct grounding).*

An exemplary diagram of battery discharge

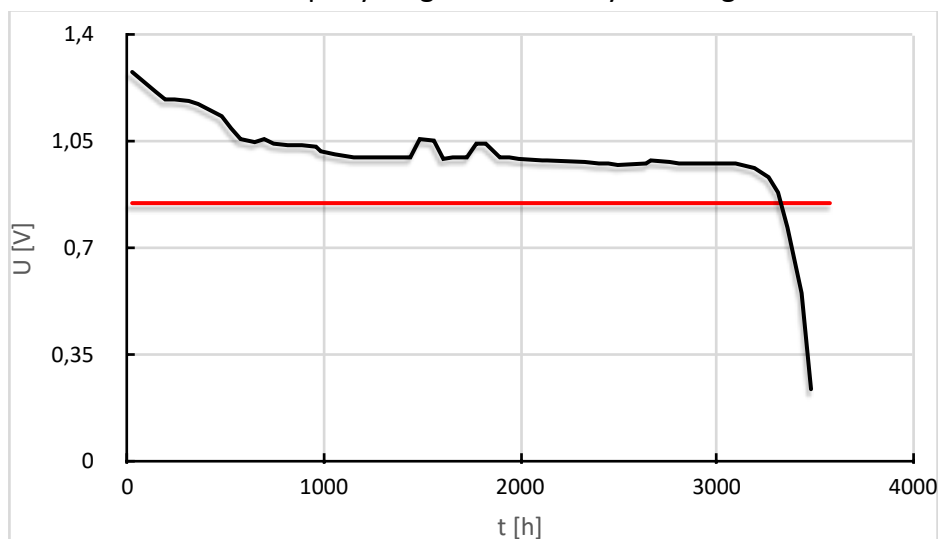

*According to the standard PN-EN 60086-2