

## AS4 50 Ah

<b>Battery:</b>	zinc-air 0% Hg, 0% Cd
Nominal voltage:	1,25 V
Discharge voltage:	0,90 V
Operating temperatures:	-5 °C ÷ 45 °C*
Minimum average time of discharge:	900 hours
Minimum average capacity:	after one year proper storage 80% of beginning value.*
W/L/H	56/56/110 ± 1mm
Minimum length of terminals:	„+“ 170 mm „-“ 180 mm
Guaranteed shelf life:	24 months
Weight:	0,36 ± 0.1 kg
Diameter of Connectors:	„+“ Ø 4 mm „-“ Ø 3 mm
Packaging:	20 pcs/carton

### Battery storage conditions and use conditions :

Temperature: 10-25 ° C\*


Humidity: 40-95%\*

Do not store batteries near heat sources or in direct sunlight.

Before connecting the battery – the vent plugs must be removed to provide air flow.

In order to make effective use of the battery, follow the electric appliance instructions (a suitable construction and length of the fence, suitable fencing wires, correct grounding).\*

An exemplary diagram of battery discharge

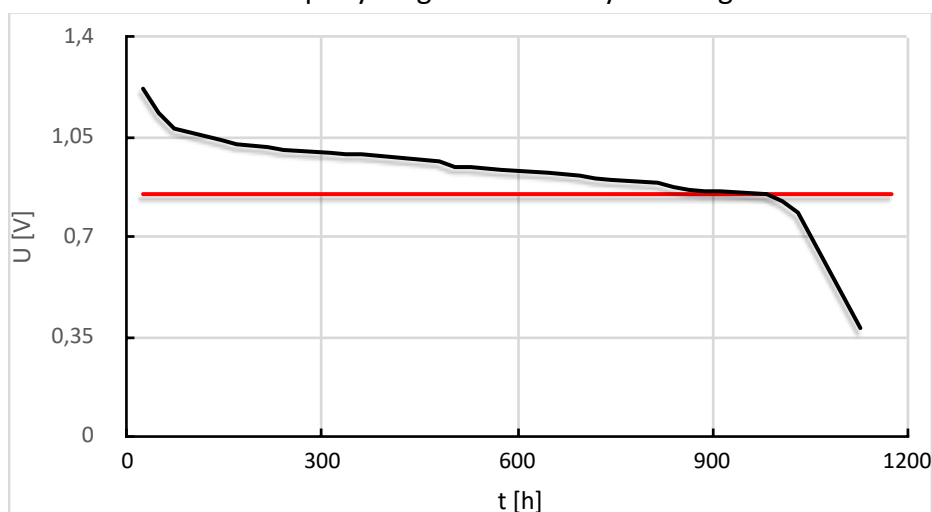

\*According to the standard PN-EN 60086-2